Break Glass call point

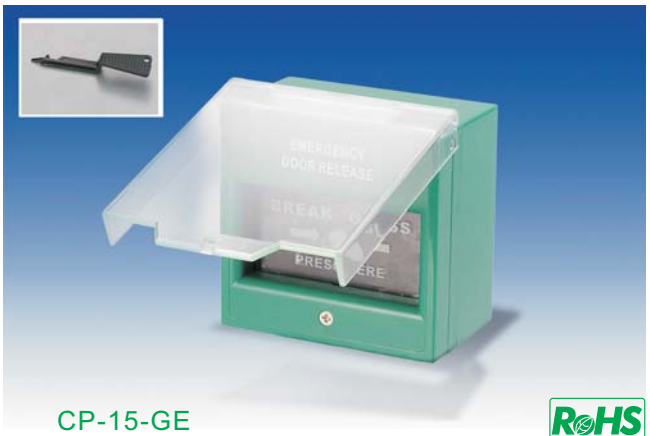

Application

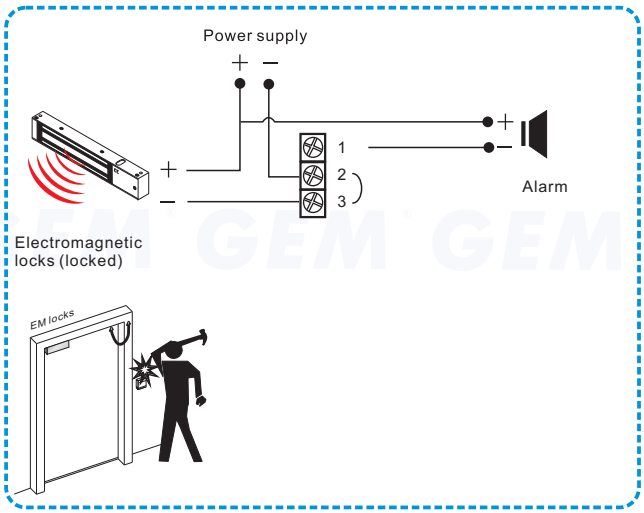

(Glass is broken)

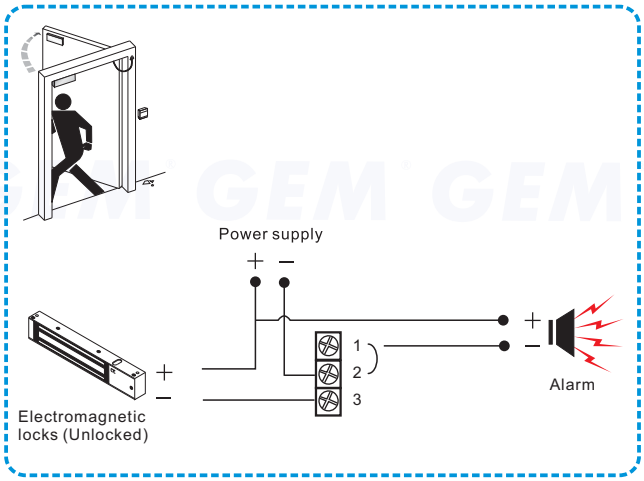

Statement

The CP-15 series Break Glass call point, with single pole change over contacts from N/C to N/O. The main function is to override the electrical locking/release devices in case of emergency. With Key to replace glass or reset unit.

The Break Glass call point comes with hinged front cover & no needs to power in contact switch for monitoring N/C change over N/O to override electrical locks / release devices for emergency with key to replace glass.

Specifications

Dimensions: 88x88x52 mm
Contact Resistance: 150m£
Switch rated: 3A@125VAC~

Dimension

Unit: mm
(Common Europe Sized)

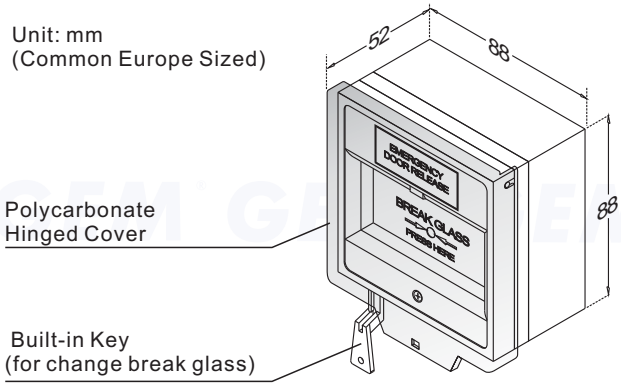

Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original customer. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.

GIANNI INDUSTRIES, INC.

No. 13, Zhong Sing Road, Tu-Cheng Industrial Zone,
Tu-Cheng City, Taipei, Taiwan 23678
Tel: 886-2 2267 7986 / Fax: 886-2 2267 9876
E-Mail: info@gianni.com.tw
Website: gianni.tw

Copyright 2008 Gianni industries, inc. All rights reserved.

DM-CA-CP-15 Ver. B Published on 2008.04.29

The products are manufactured under an ISO 9001 & QC 080000 Certified Quality Management Program environment back its product quality, performance and commitment to customer satisfaction.